

FX Range

EN54 Pt.4 Approved Power Supply



Switch mode power supply unit with 24V dc output voltage, available with a maximum output current of 1.5A, 2.5A and 5A.

The unit is a high efficiency switching power supply; protected from overloads, polarity reversals and short circuits. 4 LEDs indicate power supply status: mains power (green), battery charging (green), battery discharged (yellow) & fault (yellow).

Specifically recommended as an auxiliary power supply unit for fire detection system components such as electromagnets, notification devices, etc.

Using the unit in large systems eliminates the problem of long power cable runs which simplifies installation.

The case comes provided with a mechanical lock and tamper switch for opening and closing the front door.

Power Supply Units series 82000B are certified in accordance with the standard UNI EN54-4:1997 + A1:2002 + A2:2006.

Features and Benefits

- Switching Technology
- Fault relay
- Tamper switch
- Integral battery
- Fault indicator
- Small & large versions of metallic casing available
- EN54 Pt.4 Approved
- Output currents available: 1.5A, 2.5A, 5A
- Simple to use
- Secure steel enclosure

Technical Specification

Code	FX1-5ABP	FX1-5ABG	FX2-5ABG	FX5-0ABG
Description	Power supply			
Standards	EN 60950 pt1, EN 50130 Pt 4, EN50081, EN54 Pt4, A1:2002, A2:2006			
Specification				
Output Voltage (-)	Min 20.2, Norm 27.6, Max 29.4			
Load Current (A)	1.3 1.3 2.2 4.4			
Ripple (mV)	174 174 166 246			
Input Voltage (V~)	230 V~ -15+10%, 50/60 Hz 230 V~ -15+10%, 50/60 Hz 230 V~ -15+10%, 50/60 Hz 230 V~ -15+10%, 50/60 Hz			
Current Absorption (A max)	0.42	0.42	0.68	1.21
Battery (Pb)	2 x 12V 4.0 Ah	2 x 12V 4.0 Ah	2 x 12V 7.0 Ah	2 x 12V 17.0 Ah
Rechage Current Battery (A)	0.15	0.15	0.25	0.55
Fuses				
Switching Fs1	F2	F2	F3.15	F4
Switching Fs2	F6.3	F6.3	F6.3	F6.3
Circuit of Control F1	F2	F2	F3.15	F5
Circuit of control F2	F2	F2	F3.15	F5
Physical				
Operating Temperature	+5°C to +40°C			
Housing Material	Epoxy varnished sheet			
Standard equipment	Two keys per lock			
Packaging	1pc. / package			
Insulation Class	Classe I			
Ingress Protection	IP30			
Electrical Protection	Fuses for mains and battery overload. Short circuit in output, battery inversion. Door opening tamper.			


Installation

- Enclosure is designed for wall mounting.
- 2 x 20mm knockouts are provided for cable entry at the rear of the enclosure.
- A fused terminal block is provided for mains supply connection.
- Output is protected by internal fuse (displayed in table below).

System Functionality

- FX range power supplies provide outputs between 1.5A and 5A.
- Output is used to supply any connected load and also to recharge the integral batteries.
- To enable batteries to be charged correctly maximum continuous external load should not exceed the values displayed in the table below.
- LED indicators are provided to signify:
 - Mains healthy (Green)
 - System fault (Yellow)
 - Battery Charging (Green)
 - Charger output fault (Yellow)
- Mains healthy and system fault LED's are visible without removing front cover.

Dimensions

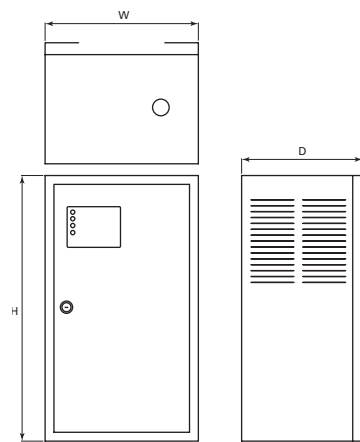

	H (mm)	W (mm)	D (mm)
P Case	290	250	180
G Case	450	260	205

Catalogue numbers

Description	Code
24V 1.5A PSU P CASE	FX1-5ABP
24V 1.5A PSU G CASE	FX1-5ABG
24V 2.5A PSU G CASE	FX2-5ABG
24V 5.0A PSU G CASE	FX5-0ABG

Eaton
Electrical Sector EMEA
Route de la Longeraie 7
1110 Morges, Switzerland

Eaton
Fire Systems Business
Cooper Lighting and Safety Ltd
Wheatley Hall Road
Doncaster
South Yorkshire
DN2 4NB
United Kingdom
Tel: +44 (0)1302 303 999
Fax: +44 (0)1302 303 333
Email: sales@cooperfire.com
Web: www.cooperfire.com

© 2014 Eaton
All Rights Reserved
Pub Reference: FDS072
October 2014

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions. Only order confirmations and technical documentation by Eaton is binding. Photos and pictures also do not warrant a specific layout or functionality. Their use in whatever form is subject to prior approval by Eaton. The same applies to Trademarks. The Terms and Conditions of Eaton apply, as referenced on Eaton Internet pages and Eaton order confirmations.

Eaton is a registered trademark. All other trademarks are property of their respective owners.